


Technical Data Sheet



Shieldex® Bilbao


No.: 1100301104

Purpose	Conductive fabric for general use
Description	Silver plated non-woven (CEREX®); 0.5 Oz
Surface Resistivity	< 2,5 Ω/□
Shielding Effectiveness	Average 45 dB from 300 MHz to 10 GHz
Temperature Range / Storage / Handling	-30 °C to 90 °C According to our care and handling instructions
Total Thickness	0.10 mm ± 20 %
Weight	17 g/m ² ± 20 %
Roll Width	100 ± 3 cm
Roll Length	50 ± 3 m
Optic	Differences in silver-grey shade have no influence on guaranteed specifications and will not be accepted as reason for claim.

Compliance and Certification



DIN EN ISO 9001:2015
REACH
RoHS

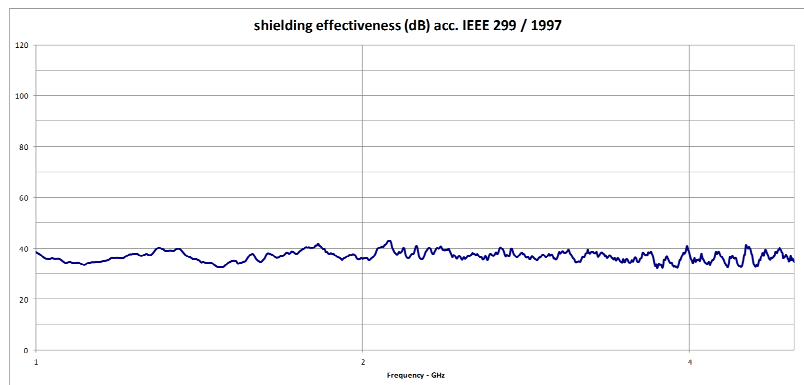

statex

Produktions- und Vertriebs GmbH

Kleiner Ort 11 - 28357 Bremen - Germany
☎: +49 421 27 50 47 - 📠: +49 421 27 36 43
info@statex.de - www.statex.de

The above information has been compiled from our manufacturer area according to the latest state of development and application technology. Since application and further processing are beyond our control, no liability of the producer can be derived from the contents of the data sheet. All deviant or transcending data sheet information must be confirmed in written form by the manufacturer. Our general terms and conditions apply in all cases. All previous data sheets are invalid with the publication of this data sheet. Please note as well our handling and storage instructions accessible at www.statex.de.