

Technical Data Sheet

Ag	Ni
Sn	Cu




Shieldex® Nora Dell

No.: 1401101S80

Purpose	Conductive woven fabric for general use (outside skin for EMI/RFI fabric over foam gaskets, shielding material for laminated flat I/O shielding panels) Base material for EMI/RFI garments Base material for EMI/RFI cable shielding
Description	Ni/Cu/Ag plated polyamide fabric (RS or PW)
Surface resistivity	Average $0.009 \Omega/\square$
Shielding effectiveness	Average up to 95 dB from 300 MHz to 10 GHz
Temperature Range / Storage / Handling	-30 °C to 90 °C According to our care and handling instructions
Total Thickness	0.125 mm \pm 15 %
Weight	100 g/m ² \pm 15 %
Roll Width	132 cm \pm 4 cm
Roll Length	Average 200 m

Compliance and Certification

DIN EN ISO 9001:2015
REACH
RoHS

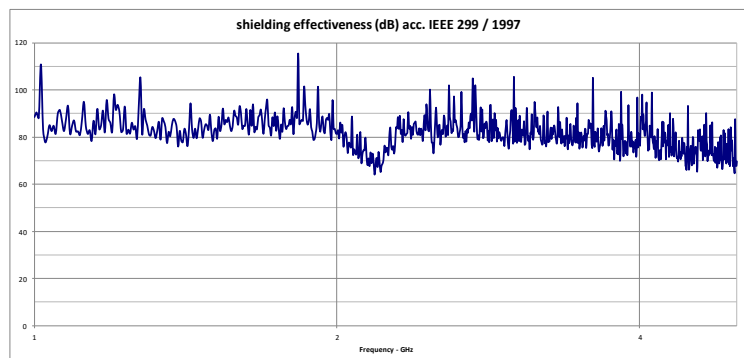

statex

Produktions- und Vertriebs GmbH

Kleiner Ort 11 - 28357 Bremen - Germany
☎: +49 421 27 50 47 - 📠: +49 421 27 36 43
info@statex.de - www.statex.de

The above information has been compiled from our manufacturer area according to the latest state of development and application technology. Since application and further processing are beyond our control, no liability of the producer can be derived from the contents of the data sheet. All deviant or transcending data sheet information must be confirmed in written form by the manufacturer. Our general terms and conditions apply in all cases. All previous data sheets are invalid with the publication of this data sheet. Please note as well our handling and storage instructions accessible at www.statex.de.

Alterations Reserved 01.11.2017/06